

# ALICHLOR HW

Detergente cloro-attivo non schiumogeno ad alto potere sequestrante

Prodotto depositato ed in attesa  
dell'autorizzazione ai sensi del  
regolamento UE N.582/2012 (BPR)

ALICHLOR HW è indicato nei lavaggi a ricircolo o a spruzzo nell'industria alimentare, delle bevande e nel settore zootecnico per la rimozione di sostanze proteiche, grassi, amidi, residui organici in genere. Adatto anche in presenza di acque dure.

## Caratteristiche chimico fisiche

<b>Aspetto fisico</b>	liquido limpido
<b>Colore</b>	giallo
<b>Odore</b>	caratteristico
<b>Densità a 20 °C</b>	ca. 1,22 g/mL
<b>pH (tal quale)</b>	ca. 12,2
<b>Cloro attivo (sol.1% in H<sub>2</sub>O)</b>	750 ppm
<b>Solubilità in acqua</b>	illimitata
<b>Formazione di schiuma</b>	assente

I dati sopra riportati sono valori tipici di produzione e non costituiscono specifica.

## Esempi di applicazione

Nell'industria lattiero-casearia per il lavaggio manuale a spruzzo o per circolazione di impianti, serbatoi, ecc.

Nell'industria delle bevande e nelle birrerie per il lavaggio di serbatoi, tubazioni, fusti, ed ambienti.

Nell'industria della lavorazione della carne, del pesce per il lavaggio, la deodorazione manuale a spruzzo di condotte recupero sangue, sale di sezionatura, porzionatura, ecc. o per circolazione di attrezzature ed impianti.

Nel settore zootecnico per il lavaggio di mungitrici e vasche di refrigerazione.

## Effetto sui materiali

Non intacca acciaio inox, vetro, ferro smaltato, PE, PVC, PP, PS alle concentrazioni d'uso. Corrode alluminio, ferro zincato. Ossida rame, ottone e bronzo. Sui rivestimenti plastici dei serbatoi, non essendone nota la natura chimica, è opportuno eseguire prove preliminari di compatibilità.

## Modalità d'impiego

### Zootecnia

Per il lavaggio di impianti centralizzati di mungitura e vasche di refrigerazione si impiega ALICHLOR HW alla concentrazione dell'1% a temperatura ambiente per 15' – 20' segue risciacquo.

### Industria lattiero-casearia

Per il lavaggio di serbatoi, tubazioni, riempitrici, usare ALICHLOR HW alla concentrazione di 0,5 – 1% a temperatura da ambiente a 60°C per 3' – 10' segue risciacquo.

### Industria della birra

ALICHLOR HW si utilizza:

- per il lavaggio di serbatoi orizzontali al 2% a temperatura ambiente per 10 – 30' segue risciacquo;
- per il lavaggio di allo 1 – 2% da ambiente a 60°C per 15 – 20', segue risciacquo;
- per il lavaggio di riempitrici allo 1 – 2% da ambiente a 60°C per 10 – 20' o per più ore in caso di invasamento, segue risciacquo;



## SCHEDA TECNICA

- per la rigenerazione di fusti e kegs della birra si effettua per invasamento con una soluzione di ALICHLOR HW allo 5% a temperatura ambiente per almeno 2 - 3 ore, segue risciacquo.

### Industria delle bevande

Si impiega ALICHLOR HW per:

- il lavaggio di serbatoi, tubazioni, contenitori, riempitrici alla concentrazione dello 1 – 2% alla temperatura da ambiente a 50°C per 20 – 30' segue risciacquo;
- il lavaggio di impianti a spina nei banchi di mescita alla concentrazione del 3% a temperatura ambiente per 20', segue risciacquo.


### Controllo delle soluzioni

#### Metodo Acidimetrico

Prelevare 100 mL di soluzione di ALICHLOR HW, aggiungere una punta di spatola di Sodio Tiosolfato, alcune gocce di Fenoltaleina. Titolare con acido Cloridrico 1N fino a scomparsa della colorazione rossa.

Concentrazione % ALICHLOR HW = ml Acido 0,1N x 0,47

### ALICHLOR HW Conducibilità 25°C

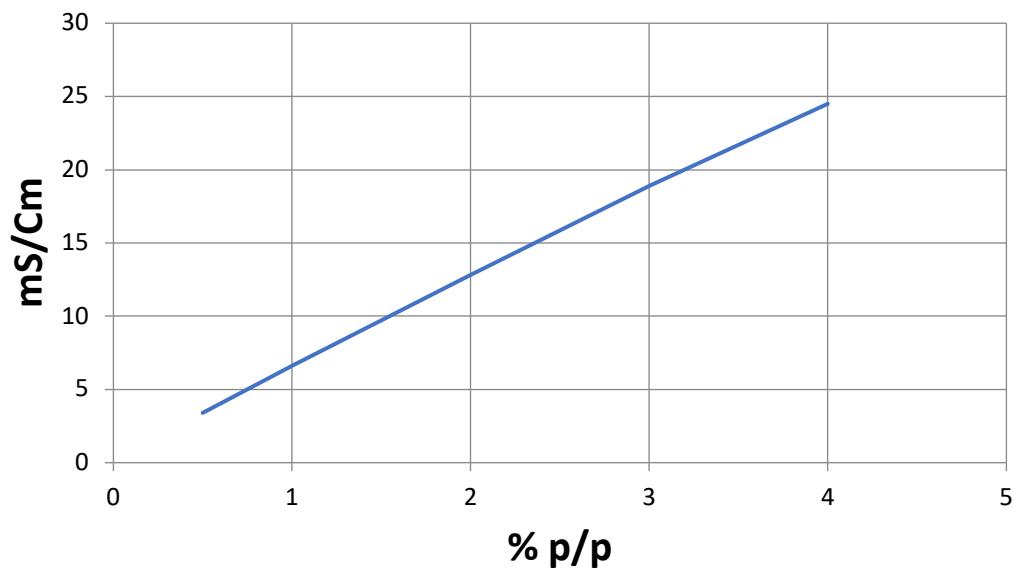

Concentrazione % p/p	Conducibilità 25°C (mS/cm)
0,5	3,4
1,0	6,6
2,0	12,8
3,0	18,9
4,0	24,5



# SCHEDA TECNICA

**Conservazione**

Il prodotto teme le temperature estreme: conservare a temperature comprese tra i 5°C e i 28°C. Il prodotto conservato correttamente nei contenitori originali mantiene inalterate le sue caratteristiche per 6 mesi.

**Informazioni sull'immagazzinamento**

Evitare l'uso improprio del prodotto. Conservare negli imballi originali chiusi o, dove applicabile, negli appositi locali o serbatoi di stoccaggio lontano da temperature estreme e lontano dalla luce del sole diretta.

Per informazioni relative alla manipolazione e allo smaltimento delle soluzioni consultare la scheda di sicurezza. I.R.C.A. SERVICE S.p.A. non è responsabile in alcun caso per l'utilizzo improprio del prodotto.

**Confezioni disponibili**

Codice	Collo	N. Conf. Strati	N. Strati Pallet	N. Conf. Pallet
69102125	Tanica 25Kg	13	2	26
60022013	Fusto 250Kg	2	1	2
60022012	IBC 1.200Kg	1	1	1

**I.R.C.A. SERVICE S.p.A.**

Strada Statale Cremasca 591 n°10  
24040 Fornovo San Giovanni (BG)  
Tel. 0363 337250 – Fax 0363 337251  
e-mail: [info@ircaservice.com](mailto:info@ircaservice.com)  
[www.ircaservice.com](http://www ircaservice com)



# ALICHLOR HW

Non-foaming chloroactive detergent with high sequestering power

Product filed and awaiting authorisation pursuant to EU regulation No. 582/2012 (BPR)

ALICHLOR HW is suitable for recirculating or spray washes in the food, beverage and livestock industry to remove protein substances, fats, starches, organic residues in general. Also suitable in the presence of hard water.

## Physical and chemical properties

<b>Physical appearance</b>	clear liquid
<b>Colour</b>	yellow
<b>Odour</b>	typical
<b>Density at 20 °C</b>	Approx. 1.22 g/ml
<b>pH (as is)</b>	Approx. 12.2
<b>Active chlorine (1% sol. in H<sub>2</sub>O)</b>	750 ppm
<b>Solubility in water</b>	unlimited
<b>Foam formation</b>	none

*The aforementioned data refer to typical production values and do not constitute a specific example.*

## Examples of application

In the dairy industry for manual spray washing or for circulation of systems, tanks, etc.

In the beverage industry and in breweries for washing tanks, pipes, drums, and rooms.

In the meat and fish processing industry for washing and manual spray deodorising blood collection tubes, dissection halls, portioning rooms, etc. or for the circulation of equipment and systems.

In the livestock industry for washing milking machines and refrigeration tanks.

## Effect on materials

It does not corrode or stain stainless steel, glass, enamelled iron, PE, PVC, PP, PS at concentrations of use. It corrodes aluminium and galvanised iron. It oxidises copper, brass and bronze. As the chemical nature of plastic tank coatings is not known, it is recommended to perform preliminary compatibility tests on them.

## Directions

### Zootechnics

For washing centralised milking plants and refrigeration tanks, use ALICHLOR HW at a 1% concentration at room temperature for 15' – 20' followed by rinsing.

### Dairy processing industry

For washing tanks, pipes and fillers use ALICHLOR HW at a 0.5-1% concentration, at temperatures ranging from room temperature to 60°C for 3 – 10' followed by rinsing.

### Brewing industry

ALICHLOR HW is used:

- For washing horizontal tanks at a 2% concentration at room temperature for 10' – 30' followed by rinsing;
- for washing at 1 – 2% from room temperature to 60°C for 15 – 20' followed by rinsing;
- For washing fillers at a 1 – 2% concentration, at temperatures ranging from room temperature to 60°C for 10' – 20' or for several hours in the case of filling, followed by rinsing;
- **for the regeneration of beer drums and kegs by filling containers with a solution of ALICHLOR HW at 5% at room temperature for at least 2 – 3 hours, followed by rinsing.**



# TECHNICAL DATA SHEET

## Beverage industry

ALICHLOR HW is used for:

- washing tanks, pipes and fillers at a 1 – 2% concentration, at temperatures ranging from room temperature to 50°C for 20 – 30' followed by rinsing;
- washing draught systems in drink dispensing counters at a 3% concentration at room temperature for 20', followed by rinsing.


## Solution control

### Acidimetric method

Take 100 ml of ALICHLOR HW solution, add a spatula tip of Sodium Thiosulphate and a few drops of Phenolphthalein. Titrate with Hydrochloric acid 1N until the red colouring disappears.

ALICHLOR HW concentration % = ml Acid 0.1N x 0.47

### ALICHLOR HW Conductivity 25°C

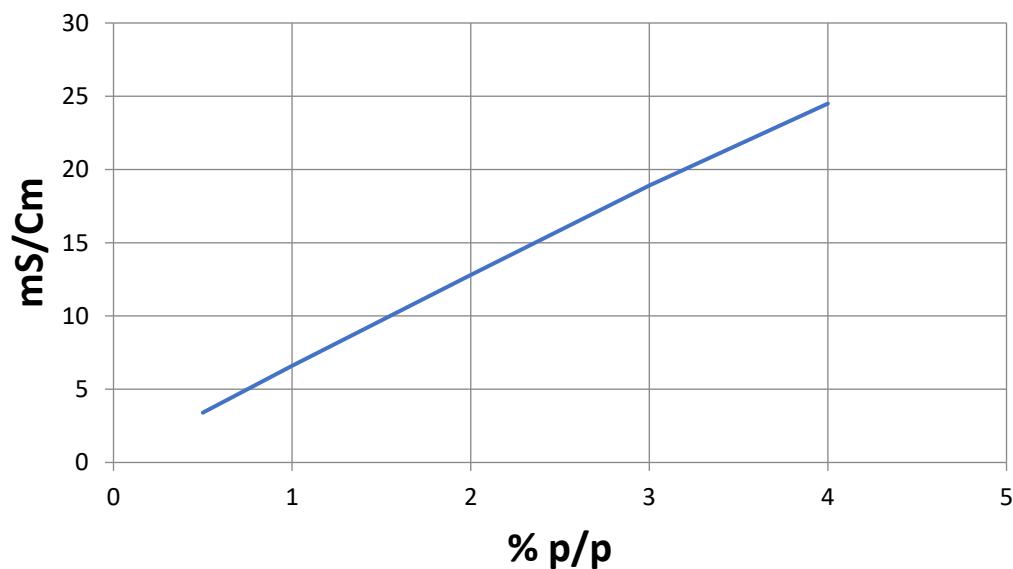

Concentration % p/p	Conductivity 25°C (mS/cm)
0.5	3.4
1.0	6.6
2.0	12.8
3.0	18.9
4.0	24.5



# TECHNICAL DATA SHEET

**Storage**

The product is vulnerable to extreme temperatures: store at temperatures between 5°C and 28°C. If properly stored in original containers, the product will keep its characteristics unchanged for 6 months.

**Storage information**

Avoid misuse of the product. Store in original sealed packages or, where applicable, in special places or storage tanks away from extreme temperatures and keep away from direct sunlight.

Refer to the Safety Data Sheet for information on handling and the disposal of solutions.

I.R.C.A. SERVICE S.p.A. is not liable for any misuse of the product.

**Available packaging**

Code	Package	Pack. No. Layers	Pallet Layer No.	Pack. No. Pallet
69102125	Tank 25Kg	13	2	26
60022013	Drum 250Kg	2	1	2
60022012	IBC 1,200Kg	1	1	1

**I.R.C.A. SERVICE S.p.A.**

Strada Statale Cremasca 591 n°10  
24040 Fornovo San Giovanni (BG)  
Tel. 0363 337250 – Fax 0363 337251  
e-mail: [info@ircaservice.com](mailto:info@ircaservice.com)  
[www.ircaservice.com](http://www.ircaservice.com)

